


MAD RIVER CANOE

Download provided free at SoloCanoes.com - Not for resale in any form

2010 Product Catalog

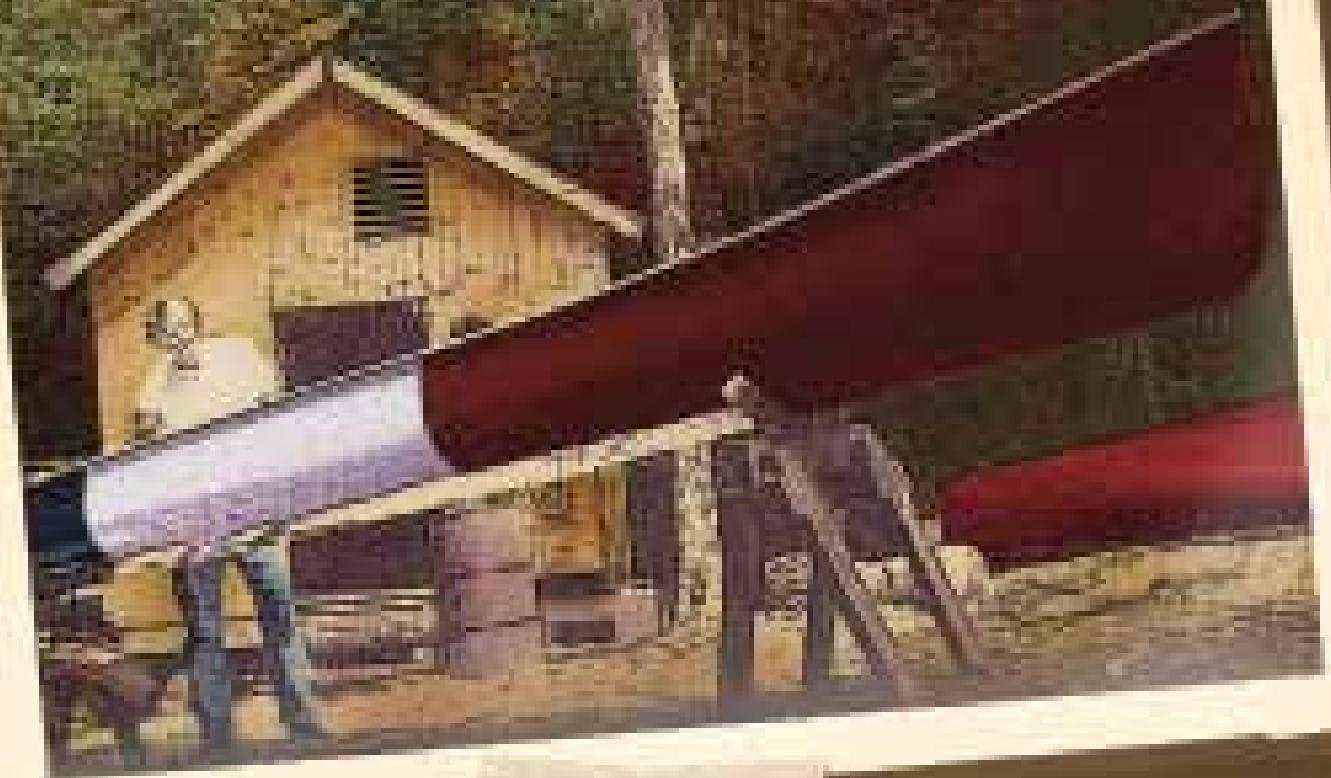

TRUTH & LEGEND



The story of Mad River Canoe begins in a patch of ferns, oh so long ago, with friend Rabbit. Native American legend has it that Rabbit was a great hunter and a bit of a trickster, but most of all Rabbit was confident in his abilities. So confident in fact, that even as Lynx circles the fern, planning his attack, Rabbit is free to enjoy his pipe, secure in his abilities to avoid this mortal enemy.

Within every legend, there is truth. And the truth in the legend of Rabbit is that confidence is a powerful asset when backed up by ability. The confidence you share with your Mad River Canoe will be backed up by our ability to produce the finest craft of its kind. We like to think that every Mad River Canoe is crafted from both truth and legend. For legends inspire us toward greatness, yet only through truth can we achieve it.

INNOVATE THEN.


Our story continues on a picturesque hillside in Vermont, circa: 1971. In his backyard shed, Jim Henry, the company founder, began his mission to build a better canoe through innovative thought, design and materials. With confidence in his abilities, he designed and built the first Malacite. He then raced in – and won – the Downriver National Championship and the rest, you know. Word spread and demand grew. A tradition of innovation was born.

From the beginning, Mad River Canoe explored new designs and experimented with new materials. We were the first to introduce Kevlar™ to the canoe industry and among the pioneers to first mold our own Royalex canoes. We now offer a wider variety of hull designs than any other canoe manufacturer and continue to push ourselves and our designs to new levels of performance. Our efforts have been rewarded with competitions won, accolades earned (including 3 “Manufacturer of the Year” awards from Canoe & Kayak magazine) and, most importantly, a growing base of loyal customers.

INNOVATE NOW.

After more than 35 years in this industry, we have never lost sight of our founder's original mission to build a better canoe. Our devotion to that ideal is not measured by a time clock or marked in a ledger. It is incorporated in every new design and evident in every innovation. We don't innovate for glory, we innovate for results. And that you can feel with every stroke of the paddle.

The following pages introduce you the realization of our promise and our passion. We invite you to experience our heritage of fine craftsmanship combined with innovative materials and design in the 2009 line-up of truly modern classics.

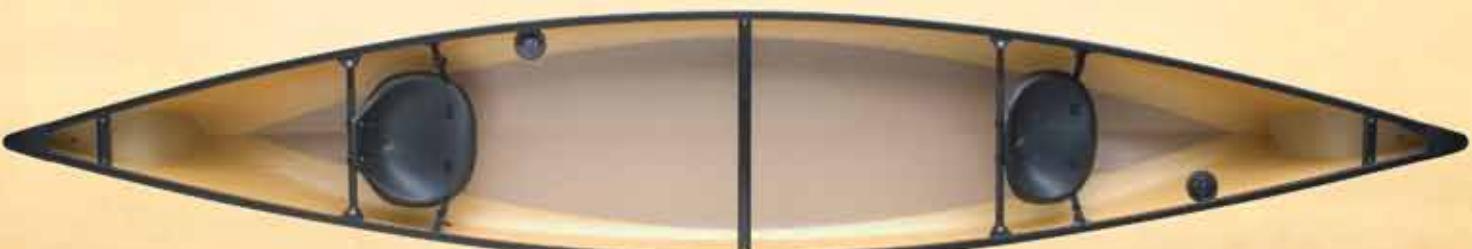

VERSATILE CANOES



VERSATILE

CANOES



In much the same way that Rabbit felt confident on all manner of terrain, our Versatile Canoes will help you feel confident on both flat and white water adventures. The moderate rocker and durable material offer all around performance with minimal compromise: the best design for most water. If your paddling takes you from rivers to lakes, our Versatile Canoes are your best bet.

VERSATILE CANOES

EXPLORER SERIES

This durable series is equally at home on the river as it is on open water. The Explorer Series tracks well and cruises on flat water and is seaworthy enough to handle chop, wind and waves with confidence.



Crafted with Royalex for carefree use in rougher, more abusive conditions, it's as close to an "all-purpose" canoe as you'll get.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|---------|--------------|---|------------|---|
| IQ2 | 72 LBS/33 KG | Vinyl IQ2 Gunwales, Web Seats, Yoke, IQ cupholders (2) | \$1,395.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat |
| WOOD | 72 LBS/33 KG | Ash Gunwales, Web Seats, Yoke | \$1,695.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat, Stained Gunwales, Slotted Gunwales |
| IQ | 72 LBS/33 KG | Aluminum IQ Gunwales, Sliding Bucket Seats, IQ Cupholders (2) | \$1,750.00 | Skid Plates, Wide Range of After-Market Modular Outfitting Available |

I6
RX

SPECIFICATIONS

Length: 15'11.25" / 486 cm

Width (4" waterline): 33.25" / 85 cm

Width (Gunwale): 35.25" / 90 cm

Depth (Center): 14.5" / 37 cm

Capacity: 1100 lbs / 499 kg

Material: Royalex
Shallow Vee Hull
Moderate Rocker



NEW Reduced weight from a lighter sheet design make this new Explorer easier to handle, load, and unload. Lightweight design also offers increased paddling efficiency for family outings and longer trips.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|----------|----------------|---|------------|---|
| ALUMINUM | 65 LBS/29.5 KG | Aluminum Gunwales, Web Seats, Yoke | \$1,395.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat |
| WOOD | 68 LBS/31 KG | Ash Gunwales, Web Seats, Yoke | \$1,695.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat, Stained Gunwales, Slotted Gunwales |
| IQ | 68 LBS/31 KG | Aluminum IQ Gunwales, Sliding Bucket Seats, IQ Cupholders (2) | \$1,750.00 | Skid Plates, Wide Range of After-Market Modular Outfitting Available |

I6
LT
RX

SPECIFICATIONS

Length: 15'11.25" / 486 cm

Width (4" waterline): 33.25" / 85 cm

Width (Gunwale): 35.25" / 90 cm

Depth (Center): 14.5" / 37 cm

Capacity: 1100 lbs / 499 kg

Material: Royalex
Shallow Vee Hull
Moderate Rocker



This lighter and sleeker Kevlar Explorer counterpart offers a touch more speed, acceleration, glide and efficiency.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|----------|---------------|--|------------|---|
| ALUMINUM | 54 LBS/24.5KG | Aluminum Gunwales, Contoured Cane Bow Seat, Cane Bucket Stern Seat, Contoured Yoke | \$2,500.00 | Additional Thwart, Skid Plates, Center Seat |
| WOOD | 57 LBS/26KG | Ash Gunwales, Contoured Cane Bow Seat, Cane Bucket Stern Seat, Yoke | \$2,795.00 | Additional thwart, Skid Plates, Stained Gunwales, Slotted Gunwales, Center Seat |
| IQ | 57 LBS/26KG | Aluminum IQ Gunwales, Sliding Bucket Seats, IQ Cupholders (2) | \$2,950.00 | Skid Plates, Wide Range of After-Market Modular Outfitting Available |

I6
KX

SPECIFICATIONS

Length: 16'3" / 495 cm

Width (4" waterline): 33.25" / 85 cm

Width (Gunwale): 34.5" / 88 cm

Depth (Center): 14.5" / 37 cm

Capacity: 1100 lbs / 499 kg

Material: Kevlar Hybrid
Shallow Vee Hull
Moderate Rocker



VERSATILE CANOES

EXPLORER SERIES

Manufactured TripleTough for years of rugged, maintenance-free reliability, the Explorer TTs also offer versatility and stability for tandem paddlers or the whole family.

I5 RX

SPECIFICATIONS

Length: 14'9" / 449 cm
Width (4" waterline): 33.75" / 86 cm
Width (Gunwale): 35.75" / 91 cm
Depth (Center): 14.25" / 36 cm
Capacity: 850 lbs / 386 kg

Material: Royalex
Shallow Vee Hull
Moderate Rocker



All the benefits of the original in a compact design. You'll find it to be quite nimble in tighter waters and a spacious, stable solo canoe as well.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|---------|----------------|---|------------|---|
| IQ2 | 62 lbs/28.2 kg | Vinyl IQ2 Gunwales, Web Seats, Yoke, IQ cupholders (2) | \$1,295.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat |
| WOOD | 62 lbs/28.2 kg | Ash Gunwales, Web Seats, Yoke | \$1,595.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat, Stained Gunwales, Slotted Gunwales |
| IQ | 62 lbs/28.2 kg | Aluminum IQ Gunwales, Sliding Bucket Seats, IQ Cupholders (2) | \$1,650.00 | Skid Plates, Wide Range of After-Market Modular Outfitting Available |

I4 TT

SPECIFICATIONS

Length: 14'6" / 442 cm
Width (4" waterline): 34" / 86 cm
Width (Gunwale): 36" / 91 cm
Depth (Center): 14.5" / 37 cm
Capacity: 850 lbs / 386 kg

Material: Triple Tough TT
Shallow Vee Hull
Moderate Rocker



Well suited for confined waterways, the classic Shallow V-Hull also offers great tracking and comforting final stability.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|---------|--------------|--|----------|-------------------------------------|
| IQ2 | 82 lbs/38 kg | Vinyl IQ2 Gunwales, Web Seats, Yoke, IQ cupholders (2) | \$850.00 | Rotmolded Seats |

I6 TT

SPECIFICATIONS

Length: 16' / 486 cm
Width (4" waterline): 34" / 86 cm
Width (Gunwale): 36" / 91 cm
Depth (Center): 14.75" / 37.5 cm
Capacity: 1100 lbs / 499 kg

Material: Triple Tough TT
Shallow Vee Hull
Moderate Rocker



This durable, full-sized family boat offers capacity, stability and sea worthiness.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|---------|--------------|--|----------|-------------------------------------|
| IQ2 | 82 lbs/38 kg | Vinyl IQ2 Gunwales, Web Seats, Yoke, Thwart, IQ cupholders (2) | \$900.00 | Rotmolded Seats |

VERSATILE CANOES

FREE DOM SOLO/MALECITE

The Malecite is fast and efficient and accommodates both solo and tandem paddling. And the Freedom Solo is, quite simply, the most versatile solo boat on the market for mixed water conditions and uses.



The perfect solo river-running boat for day trips or expeditions.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|---------|--------------|--|------------|--|
| IQ2 | 55 lbs/25 kg | Vinyl IQ2 Gunwales, Web Seat, Thwarts (2), IQ cupholder (1) | \$1,295.00 | Cane Seat, Skid Plates |
| WOOD | 56 lbs/25 kg | Ash Gunwales, Web Seat, Thwarts (2) | \$1,595.00 | Cane Seat, Skid Plates, Stained Gunwales, Slotted Gunwales |
| IQ | 57 lbs/26 kg | Aluminum IQ Gunwales, Sliding Bucket Seat, IQ Cupholder (1), Thwarts (2) | \$1,650.00 | Skid Plates, Wide Range of After-Market Modular Outfitting Available |

FREEDOM SOLO

SPECIFICATIONS

Length: 14'6.75" / 444 cm
Width (4" waterline): 29" / 74 cm
Width (Gunwale): 30.5" / 78 cm
Depth (Center): 14.25" / 36 cm
Capacity: 750 lbs / 340 kg

Material: Royalex
Shallow Arch Hull
Moderate Rocker



A sleek, fast traveler with surprising sea-worthiness and stimulating efficiency.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|----------|----------------|--|------------|---|
| ALUMINUM | 51 lbs/23.2 kg | Aluminum Gunwales, Contoured Cane Bow Seat, Cane Bucket Stern Seat, Yoke | \$2,450.00 | Additional Thwart, Skid Plates, Center Seat |
| WOOD | 54 lbs/24.5 kg | Ash Gunwales, Contoured Cane Bow Seat, Cane Bucket Stern Seat, Yoke | \$2,750.00 | Additional Thwart, Skid Plates, Stained Gunwales, Slotted Gunwales, Center Seat |
| IQ | 54 lbs/24.5 kg | Aluminum IQ Gunwales, Sliding Bucket Seats, IQ Cupholders (2) | \$2,895.00 | Skid Plates, Wide Range of After-Market Modular Outfitting Available |

MALECITE

SPECIFICATIONS

Length: 16'5.25" / 501 cm
Width (4" waterline): 32.25" / 82 cm
Width (Gunwale): 34.5" / 88 cm
Depth (Center): 13" / 33 cm
Capacity: 850 lbs / 386 kg

Material: Kevlar Hybrid
Shallow Vee Hull
Slight Rocker



RIVER CANOES



RIVER CANOES



The question is inevitable. And the answer is yes. There is, in fact, a Mad River. Its waters run through Waitsfield, Vermont, where Mad River Canoe was first founded. Our River Canoes are good, adaptable boats designed with added emphasis on performance in moving waters, favoring maneuverability over tracking.

LEGEND SERIES

The shallow arch hull and moderate rocker of these canoes allow for effortless exploration and discovery of your favorite river along with all its treasures.



Class II-III capable. Nimble and capable of negotiating rocky rivers and coastal bayous.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|---------|----------------|--|------------|---|
| IQ2 | 62 lbs/28.2 kg | Vinyl IQ2 Gunwales, Web Seats, Yoke, IQ cupholders (2) | \$1,295.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat |
| WOOD | 62 lbs/28.2 kg | Ash Gunwales, Web Seats, Yoke | \$1,595.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat, Stained Gunwales, Slotted Gunwales |

I5
RX

SPECIFICATIONS

Length: 15' / 457 cm

Width (4" waterline): 33" / 84 cm

Width (Gunwale): 33.5" / 85 cm

Depth (Center): 14.5" / 37 cm

Capacity: 960 lbs / 435 kgg

Material: Royalex
Shallow Arch Hull
Moderate Rocker



Ideally suited for shallow, boisterous rivers with capacity for extended mixed water trips with or without gear.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|---------|--------------|--|------------|---|
| IQ2 | 72 lbs/33 kg | Vinyl IQ2 Gunwales, Web Seats, Yoke, Thwart, IQ cupholders (2) | \$1,395.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat |
| WOOD | 72 lbs/33 kg | Ash Gunwales, Web Seats, Yoke, Thwart | \$1,695.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat, Stained Gunwales, Slotted Gunwales |

I6
RX

SPECIFICATIONS

Length: 16' / 488 cm

Width (4" waterline): 33.5" / 85 cm

Width (Gunwale): 33.5" / 85 cm


Depth (Center): 14.5" / 37 cm

Capacity: 1100 lbs / 499 kg

Material: Royalex
Shallow Arch Hull
Moderate Rocker



TOURING CANOES

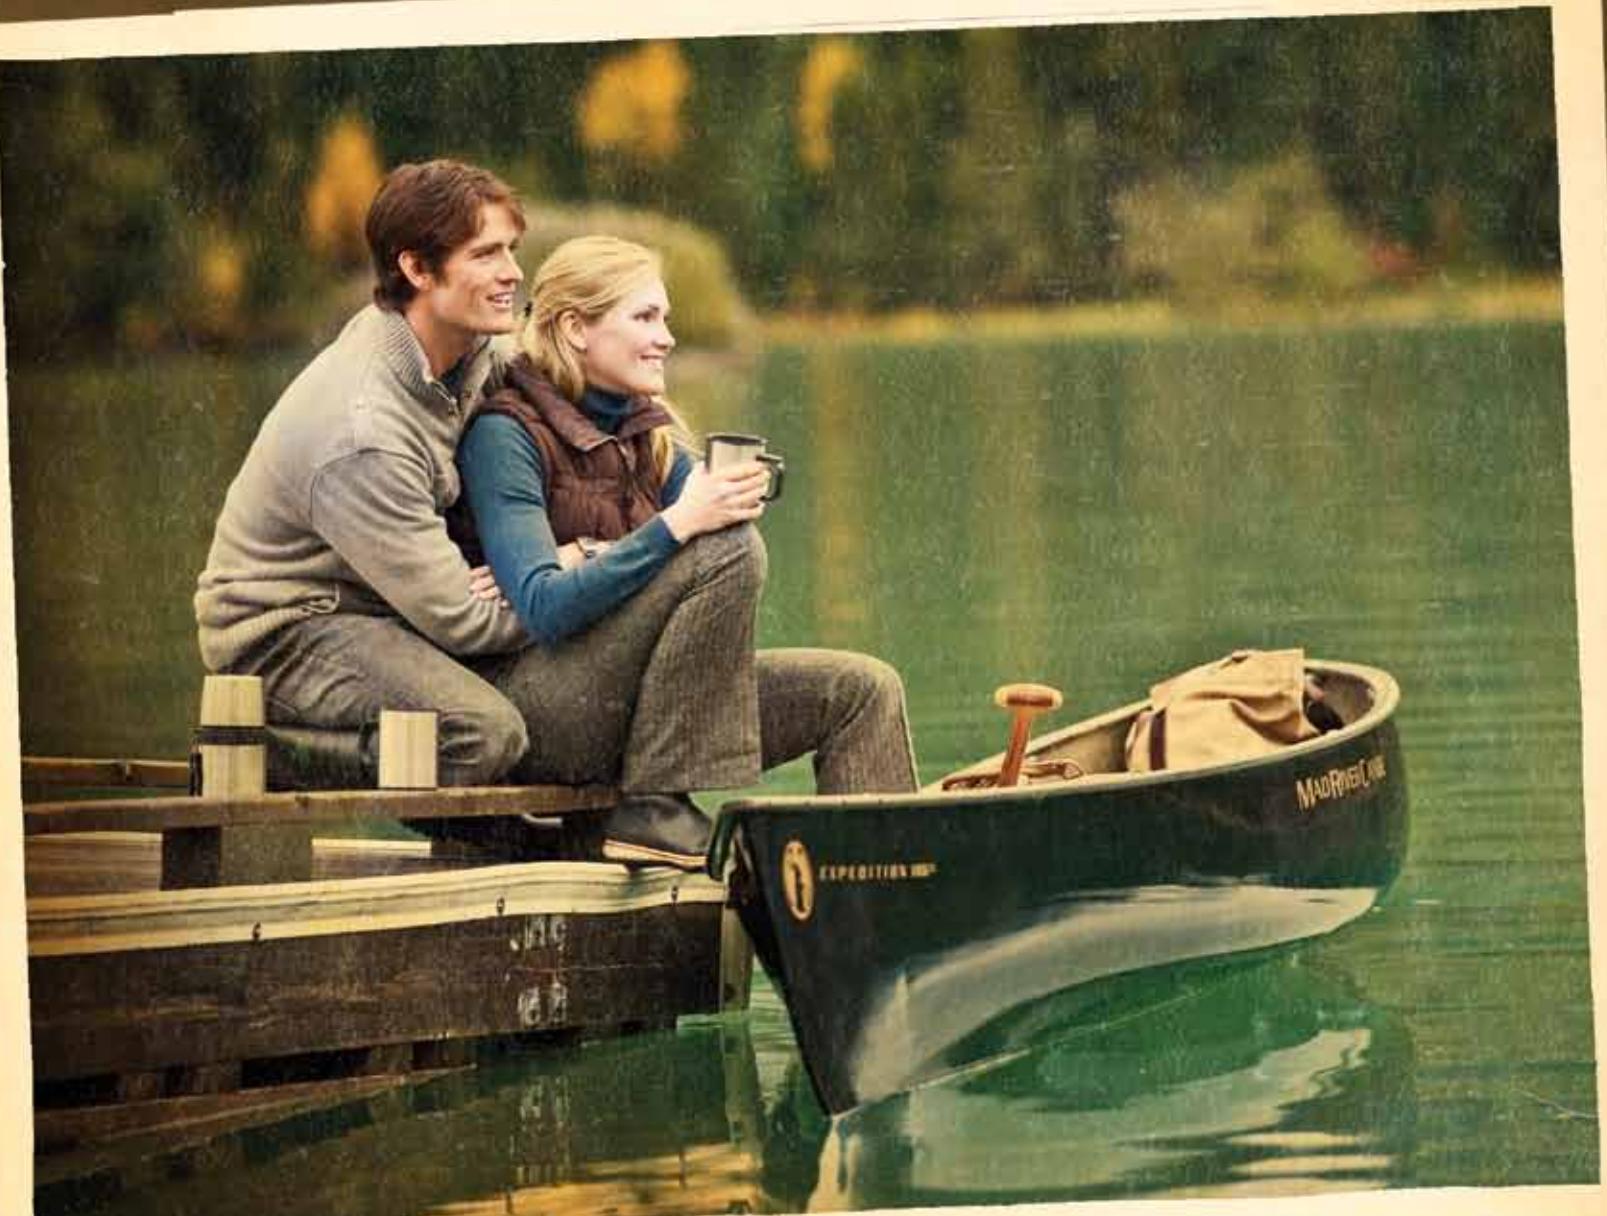

TOURING CANOES



The process of designing and building boats is as much art as science. And for many of us, the journey can be more rewarding than the destination. If you are one who appreciates the beauty and discovery of the journey, then our Touring Canoes were crafted with you in mind. Designed for cruising on open waters, these hulls and material offer a light weight and maximum paddling efficiency.

REFLECTION SERIES / EXPEDITION

The Reflection series offers reassuring stability, effortless straight-ahead efficiency and surprising maneuverability for use on lakes or rivers. At 45-48 lbs and 18'6" long, the Expedition is bringing tripping back in a big way. Designed with very little rocker and an asymmetrical hull, this hybrid composite "super" canoe will track true and stay on course throughout your entire journey.



This compact responsive tandem sustains speed while remaining nimble on both flat water and river.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|----------|----------------|---|------------|---|
| ALUMINUM | 58 lbs/27 kg | Aluminum Gunwales, Web Seats, Yoke | \$1,195.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat |
| WOOD | 61 lbs/27.7 kg | Ash Gunwales, Web Seats, Yoke | \$1,500.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat, Stained Gunwales, Slotted Gunwales |
| IQ | 61 lbs/27.7 kg | Aluminum IQ Gunwales, Sliding Bucket Seats, IQ Cupholders (2) | \$1,550.00 | Skid Plates, Wide Range of After-Market Modular Outfitting Available |

SPECIFICATIONS
Length: 15'4" / 467 cm
Width (4" waterline): 33" / 84 cm
Width (Gunwale): 34" / 86 cm
Depth (Center): 13.5" / 34 cm
Capacity: 800 lbs / 363 kg

Material: Royalex
Shallow Arch Hull
Slight Rocker



REFLECTION I7

SPECIFICATIONS
Length: 17'4" / 528 cm
Width (4" waterline): 33" / 84 cm
Width (Gunwale): 33.5" / 85 cm
Depth (Center): 13" / 33 cm
Capacity: 900 lbs / 408 kg



The large capacity and long hull make this an ideal choice for multi-day tripping and family use.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|----------|----------------|---|------------|---|
| ALUMINUM | 66 lbs/30 kg | Aluminum Gunwales, Web Seats, Yoke, Thwart | \$1,295.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat |
| WOOD | 69 lbs/31.4 kg | Ash Gunwales, Web Seats, Yoke, Thwart | \$1,595.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat, Stained Gunwales, Slotted Gunwales |
| IQ | 69 lbs/31.4 kg | Aluminum IQ Gunwales, Sliding Bucket Seats, IQ Cupholders (2) | \$1,650.00 | Skid Plates, Wide Range of After-Market Modular Outfitting Available |

Material: Royalex
Shallow Arch Hull
Slight Rocker



EXPEDITION 186

SPECIFICATIONS
Length: 18'6" / 564 cm
Width (4" waterline): 31" / 79 cm
Width (Gunwale): 34" / 86 cm
Depth (Center): 14.5" / 37 cm
Capacity: 1250 lbs / 568 kg




Able to carry substantial gear while maintaining a rapid pace, the Expedition 186 also excels as a comfortable, yet high performance cruising hull when unburdened.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|---------|----------------|---|------------|-------------------------------------|
| WOOD | 59 lbs/26.8 kg | Slotted Ash Gunwales, Sliding Cane Bucket Bow Seat, Cane Bucket Stern Seat, Thwart, Yoke, Stern Footbrace | \$3,100.00 | Additional Thwart, Skid Plates |

Material: Kevlar Hybrid
Shallow Vee Hull
Slight Rocker



WHITEWATER CANOES

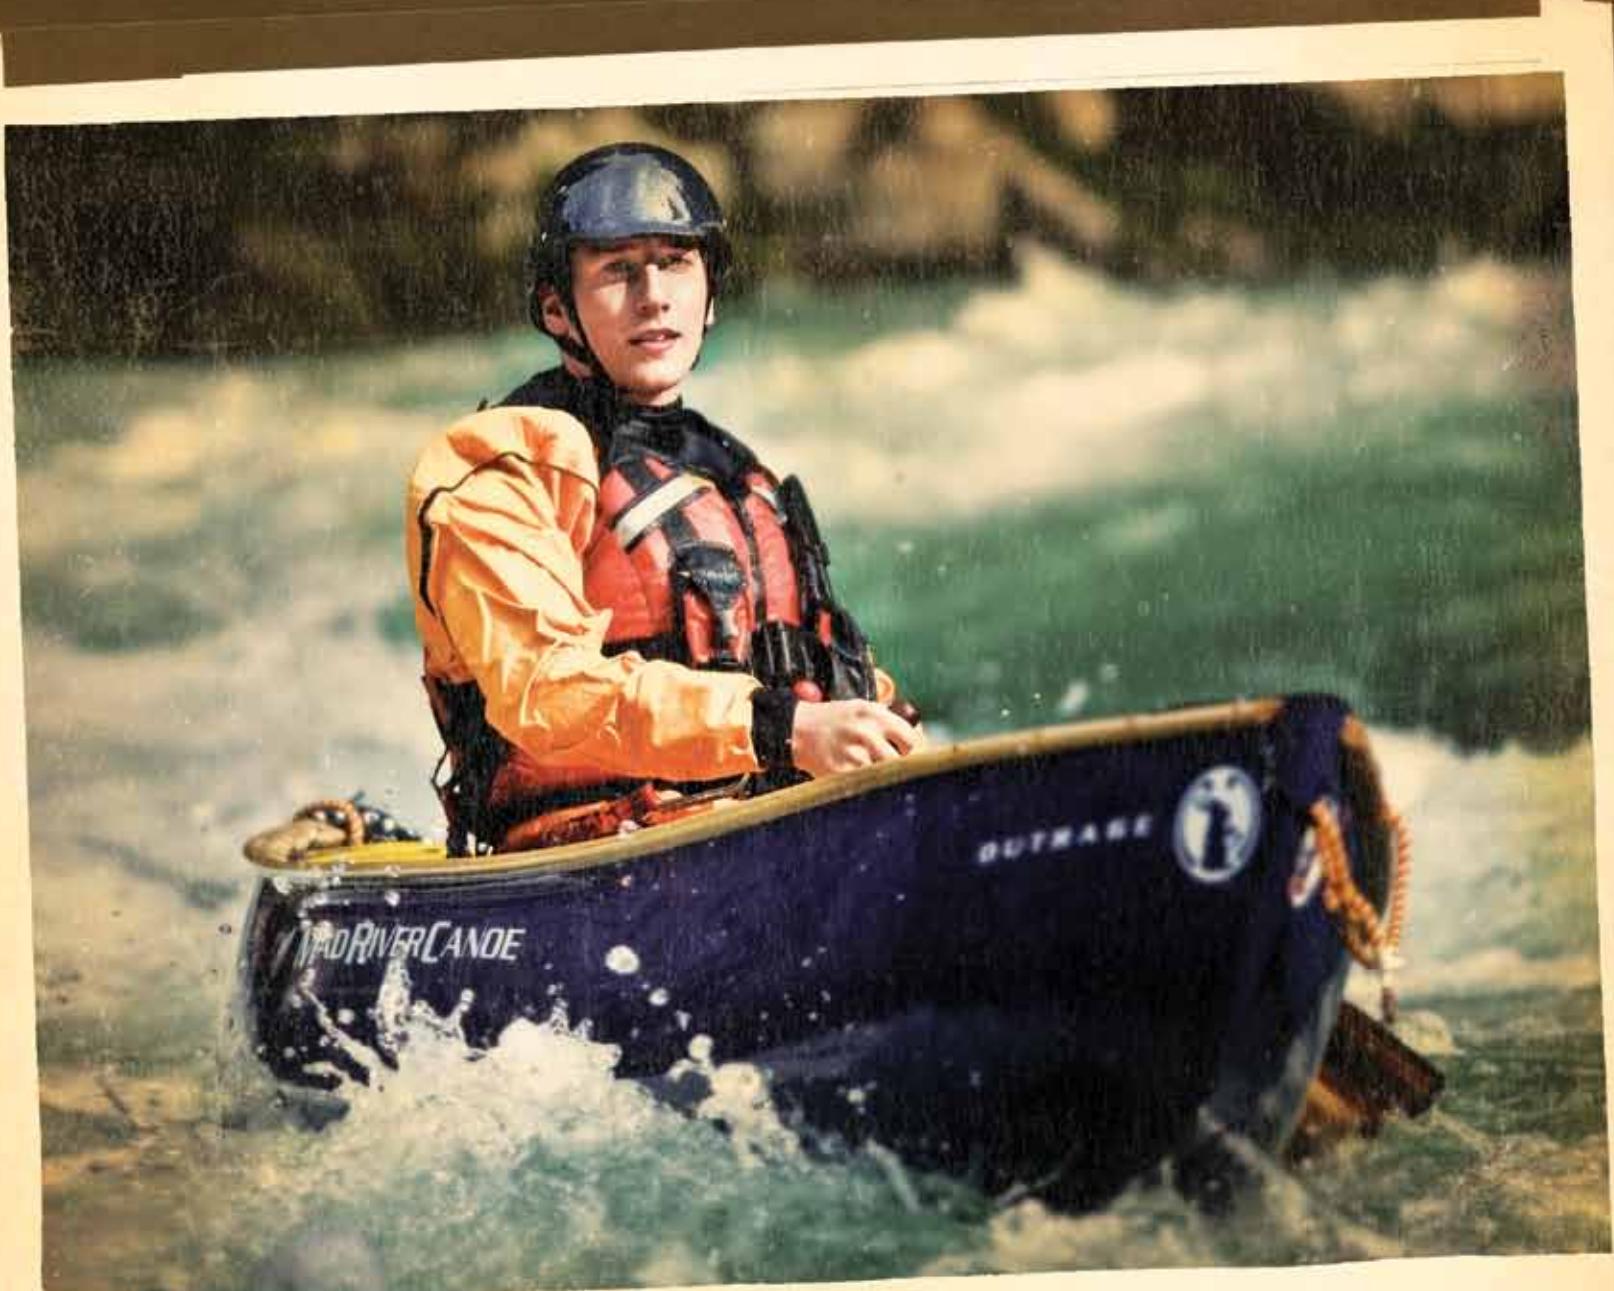

WHITEWATER CANOES



Rabbit's reputation as a trickster reminds us to incorporate an element of play in our days as well as our designs. And always end our day with a smile. We invite you to do the same and offer our Whitewater Canoes to help find the fun. These are very specialized boats for high level whitewater play. These tried and true designs can go anywhere a kayak can go and have won more than their share of whitewater championships.

OUTRAGE / CAPTION

When you say "play boat" the image in your head is the Outrage. Designed for different sized paddlers, select the edition that fits you best. And for tandem performance and agility, Caption is the only name you need to know.



Royalex construction and proven design bring this canoe victories time and again. For the 190 pound and under paddler.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|---------|----------------|---|------------|---|
| IQ2 | 52 lbs/23.6 kg | Vinyl IQ2 Gunwales, 2 Thwarts, IQ Cupholder (1) | \$1,195.00 | Ready-To-Go Outfitting, Ready-To-Go Upgrade Outfitting, Skid Plates |
| WOOD | 52 lbs/23.6 kg | Ash Gunwales, 2 Thwarts | \$1,295.00 | Ready-To-Go Outfitting, Ready-To-Go Upgrade Outfitting, Skid Plates, Stained Gunwales, Slotted Gunwales |

OUTRAGE RX

SPECIFICATIONS

Length: 12' / 365 cm

Width (4" waterline): 26.75" / 68 cm

Width (Gunwale): 25.5" / 65 cm

Depth (Center): 15.5" / 39 cm

Capacity: 425 lbs / 193 kg

Material: Royalex
Shallow Arch Hull
Extreme Rocker



A high performance play boat for the 190 pound and up paddler.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|---------|--------------|---|------------|---|
| IQ2 | 53 lbs/24 kg | Vinyl IQ2 Gunwales, 2 Thwarts, IQ Cupholder (1) | \$1,250.00 | Ready-To-Go Outfitting, Ready-To-Go Upgrade Outfitting, Skid Plates |
| WOOD | 53 lbs/24 kg | Ash Gunwales, 2 Thwarts | \$1,350.00 | Ready-To-Go Outfitting, Ready-To-Go Upgrade Outfitting, Skid Plates, Stained Gunwales, Slotted Gunwales |

OUTRAGE X RX

SPECIFICATIONS

Length: 13' / 396 cm

Width (4" waterline): 27.25" / 69 cm

Width (Gunwale): 25.5" / 65 cm

Depth (Center): 15" / 38 cm

Capacity: 550 lbs / 250 kg

Material: Royalex
Shallow Arch Hull
Extreme Rocker



The celebrated benchmark for tandem, open canoe, whitewater play boats.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|---------|--------------|--|------------|-------------------------------------|
| IQ2 | 53 lbs/24 kg | Vinyl IQ2 Gunwales, 2 Thwarts, IQ Cupholders (2) | \$1,295.00 | Skid Plates |
| WOOD | 53 lbs/24 kg | Ash Gunwales, 2 thwarts | \$1,395.00 | Skid Plates |

CAPTION RX

SPECIFICATIONS

Length: 14' / 428 cm

Width (4" waterline): 30.5" / 77 cm


Width (Gunwale): 30" / 76 cm

Depth (Center): 15.5" / 39 cm

Capacity: 850 lbs / 386 kg

Material: Royalex
Shallow Arch Hull
Extreme Rocker

RECREATION CANOES

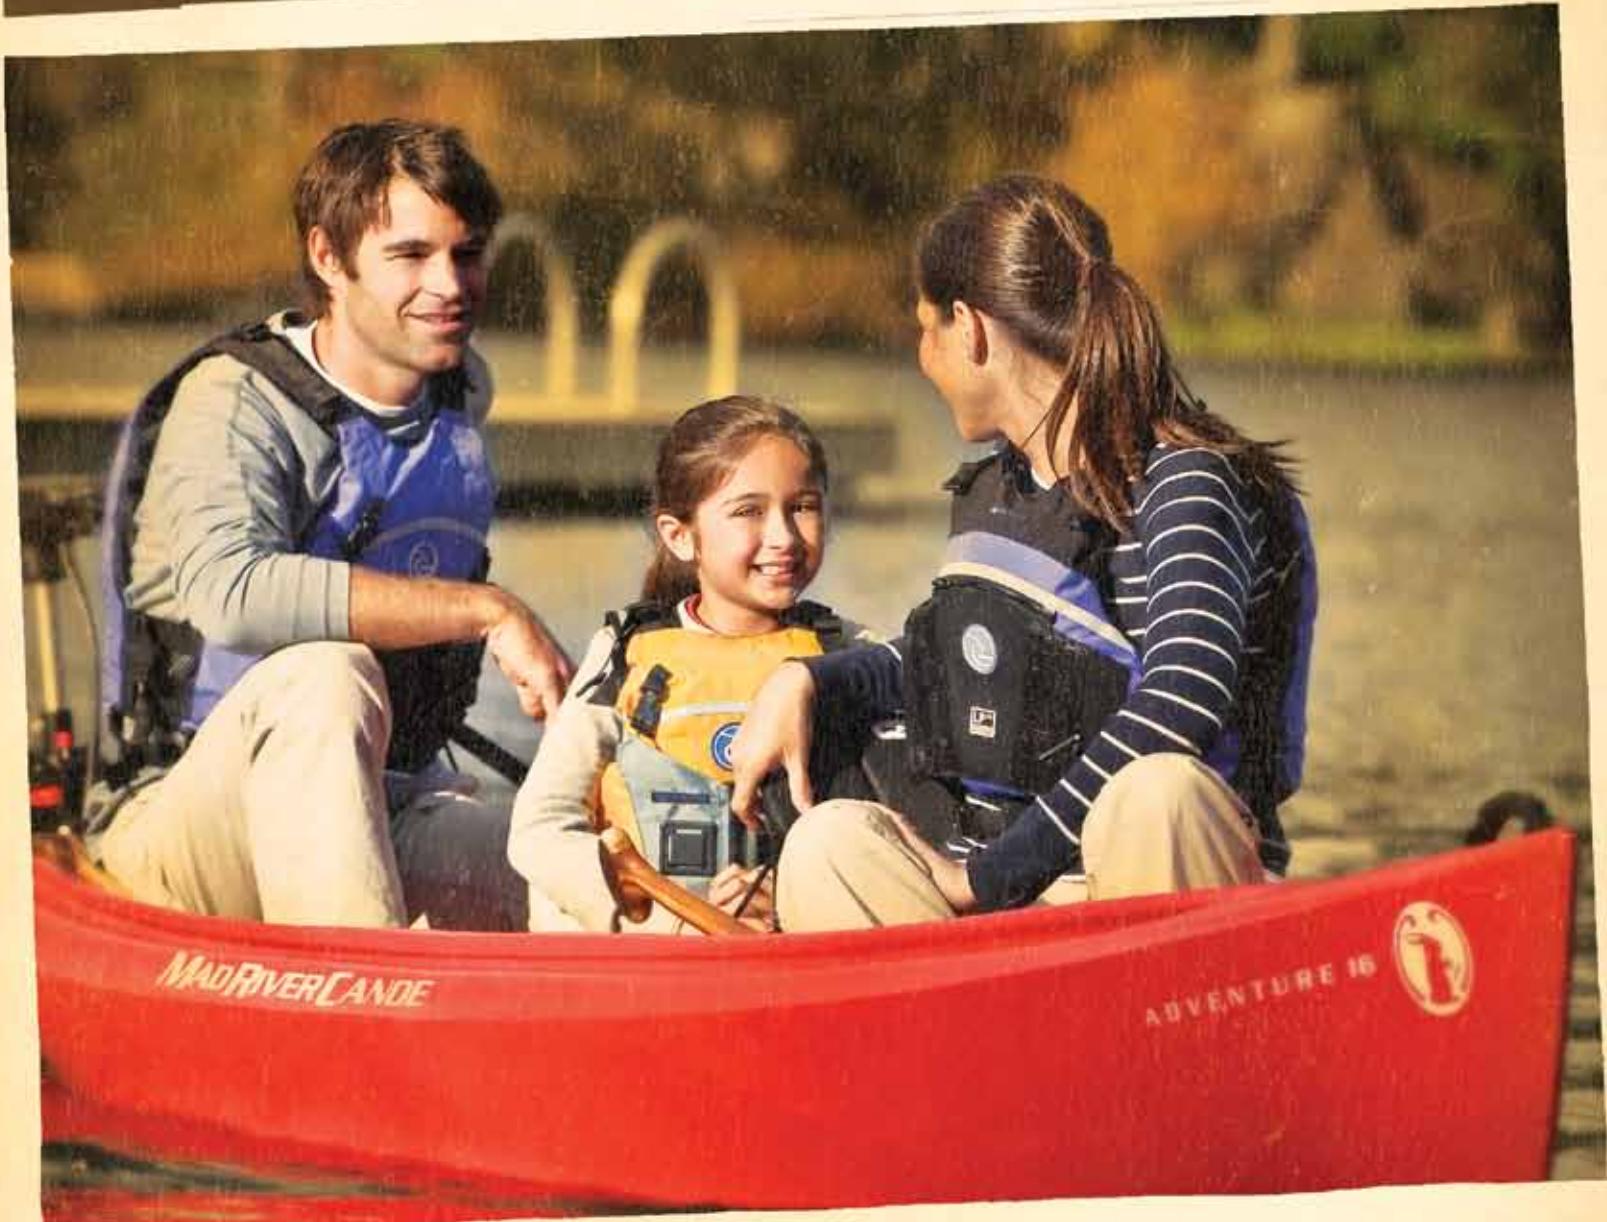

RECREATION CANOES



The innovation we bring to the canoe industry is not limited to design and construction. We're constantly investigating new ways to grow our family of paddlers. For those who are newly introduced to this world or who are looking for a low maintenance solution for getting their family on the water, we offer our selection of Recreational Canoes. Easy paddling, multiple uses and virtually no upkeep, make these the ultimate grab-and-go boats.

ADVENTURE SERIES

This durable series is equally at home on the river as it is on open water. The Explorer Series tracks well and cruises on flat water and is seaworthy enough to handle chop, wind and waves with confidence.



All the performance and maintenance-free ease of the 16, with added stability and ease of handling.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|----------|--------------|---|----------|-------------------------------------|
| INTEGRAL | 75 lbs/34 kg | Padded Center Seat, Padded Bow & Stern Seats with Padded Adjustable Backrests, Mesh Pockets (2), Gear Tray, Cupholders (6), | \$695.00 | None |

I4

SPECIFICATIONS

Length: 14' / 427 cm

Width (4" waterline): 34" / 86 cm

Width (Gunwale): 33" / 84 cm

Depth (Center): 14.5" / 37 cm

Capacity: 875 lbs / 397 kg

Material: Polyethylene
Multi Chine Shallow Arch Hull
Slight Rocker



Everything you want - contoured seats, padded adjustable backrests, even cup holders and center seats are standard. Squareback design supports a trolling motor without any modifications.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|----------|--------------|--|----------|-------------------------------------|
| INTEGRAL | 84 lbs/38 kg | Padded Center Seat, Padded Bow & Stern Seats with Padded Adjustable Backrests, Mesh Pockets (2), Gear Tray, Cupholders (6), Integral Stem Motor Mount for Electric Trolling Motors | \$795.00 | None |

I6

SPECIFICATIONS

Length: 16' / 488 cm

Width (4" waterline): 34" / 86 cm

Width (Gunwale): 33" / 84 cm

Depth (Center): 14" / 36 cm

Capacity: 950 lbs / 431 kg

Material: Polyethylene
Multi Chine Shallow Arch Hull
Slight Rocker




SPORTING CANOES



SPORTING CANOES

Legend has it, that Rabbit was a great hunter. In fact, he once caught The Man in the Moon. He returned him of course. It was the sporting thing to do. Naturally, any sporting canoe we would put forth would be designed with the sportsman in mind. Our Sporting Canoes offer a high level of stability and easy access to gear, making for enjoyable days on the lake or in the marsh.



DUCK HUNTER / ANGLER

The Duck Hunter offers classic styling paired with uncompromising functionality. And the Angler provides reassuring stability that allows you to focus on your fishing.



Crafted with an Explorer hull (olive drab in and out), this timeless canoe is fashioned with classic cane seats along with dark stained slotted ash gunwales, thwart and yoke.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|---------|--------------|---|------------|-------------------------------------|
| WOOD | 74 lbs/34 kg | Slotted & Stained Ash Gunwales, Stained Cane Seats, Yoke, Thwart, Gold Decals | \$1,795.00 | Skid Plates |

DUCK HUNTER I6

SPECIFICATIONS

Length: 15'11.25" / 486 cm
Width (4" waterline): 33.25" / 85cm
Width (Gunwale): 35.25" / 90 cm
Depth (Center): 14.5" / 37 cm
Capacity: 1100 lbs / 499 kg

Material: Royalex
Shallow Vee Hull
Moderate Rocker



NEW The new Duckhunter 15 is an exact match of the original, yet at 14' 9" and 63 pounds, it's about 14" shorter and about 10 pounds lighter. Ideal for sportsmen navigating the twisty marshes by the coast or for any paddler who appreciates its timeless design.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|---------|--------------|---|------------|-------------------------------------|
| WOOD | 64 lbs/29 kg | Slotted & Stained Ash Gunwales, Stained Cane Seats, Yoke, Thwart, Gold Decals | \$1,695.00 | Skid Plates |

DUCK HUNTER I5

SPECIFICATIONS

Length: 14'9" / 449 cm
Width (4" waterline): 33.75" / 86 cm
Width (Gunwale): 35.75" / 91 cm
Depth (Center): 14.25" / 36 cm
Capacity: 850 lbs / 386 kg

Material: Royalex
Shallow Vee Hull
Moderate Rocker



The lightweight yet durable Royalex hull design makes this an ideal "poke-around" canoe for lakes and ponds: excellent for fishing and hunting.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|----------|----------------|---|------------|---|
| ALUMINUM | 56 lbs/25 kg | Aluminum Gunwales, Web Seats, Yoke | \$1,195.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat |
| WOOD | 59 lbs/26.8 kg | Ash Gunwales, Web Seats, Yoke | \$1,495.00 | Cane Seats, Additional Thwart, Skid Plates, Center Seat, Stained Gunwales, Slotted Gunwales |
| IQ | 59 lbs/26.8 kg | Aluminum IQ Gunwales, Sliding Bucket Seats, IQ Cupholders (2) | \$1,550.00 | Skid Plates, Wide Range of After-Market Modular Outfitting Available |

ANGLER I4

SPECIFICATIONS

Length: 13'11" / 424 cm
Width (4" waterline): 35.5" / 90 cm
Width (Gunwale): 37.25" / 96 cm
Depth (Center): 14.25" / 36 cm
Capacity: 750 lbs / 340 kg

Material: Royalex
Shallow Arch Hull
Slight Rocker

∞ S Y N E R G Y S E R I E S ∞

Exceptional stability and high capacity, the Synergy is ready for many kinds of recreation. It's a canoe version of a sit-on-top with the added benefit of generous, easily-accessible gear storage. The unique design keeps going in conditions where traditional sit-on-tops are beached.

I2

SPECIFICATIONS

Length: 12' / 366 cm
 Width (4" waterline): 28" / 71 cm
 Width (Gunwale): 30.75" / 78 cm
 Depth (Center): 10" / 25 cm
 Capacity: 350 lbs / 131 kg

Material: Polyethylene
 Multi Chine Shallow Arch Hull
 Slight Rocker



Deeper and drier than conventional SOTs, its features include rod holders, cargo nets and padded seats with adjustable back rests.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|----------|--------------|---|----------|-------------------------------------|
| INTEGRAL | 60 lbs/27 kg | Padded Seat with Adjustable Padded Backrest, Adjustable Foot braces, Mesh Tankwell Covers, Rod Notches, Cockpit Bungee Tie Down, Center Inspection Hatch, 2 Flush Mount Rod Holders, Side Comfort Carry Handles with Paddle Parks | \$750.00 | None |

I4

SPECIFICATIONS

Length: 14' / 428 cm
 Width (4" waterline): 28" / 71 cm
 Width (Gunwale): 30" / 76 cm
 Depth (Center): 10" / 25 cm
 Capacity: 400 lbs / 149 kg

Material: Polyethylene
 Multi Chine Shallow Arch Hull
 Slight Rocker



Get all the benefits of the I2, with added speed and glide, making the I4 a great choice for longer days on the water.

| GUNWALE | AVG WEIGHT | STANDARD FEATURES | MSRP | AVAILABLE FACTORY-INSTALLED OPTIONS |
|----------|--------------|---|----------|-------------------------------------|
| INTEGRAL | 64 lbs/29 kg | Padded Seat with Adjustable Padded Backrest, Adjustable Foot braces, Mesh Tankwell Covers, Rod Notches, Cockpit Bungee Tie Down, Center Inspection Hatch, 2 Flush Mount Rod Holders, Side Comfort Carry Handles with Paddle Parks | \$850.00 | None |



CANOE DESIGN

THE ELEMENTS



Measured at the widest point of the canoe and largely impacts stability and speed. The most common reference is width at the gunwales but an often more telling dimension is width at the waterline as this will determine the amount of effort required to move the boat through the water.

NARROW (33" OR LESS):

Pros

- Speed
- Paddling efficiency
- Easier Solo Paddling

Cons

- Lower initial stability
- Lower Capacity

MEDIUM (34-37"):

Pros

- Good blend of speed, stability, and capacity
- Versatility, can be paddled solo or tandem

Cons

- Speed/glide falls below narrow canoe
- Initial stability lower than a wide canoe

WIDE (38" OR MORE):

Pros

- Higher initial stability
- Stable platform for fishing, photography, etc.

Cons

- Slow
- Poor glide
- Farther reach to water
- Difficult to paddle solo



Measured stem to stem and is the most straightforward of all the aspects of canoe design. In terms of versatility, canoes in and around 16' are preferred. Large enough to be paddled tandem with a load or soloed on occasion and fast enough for touring yet nimble enough to work their way down a twisty stream. Canoes with emphasis on cruising speed tend to be longer while whitewater canoes shorter with a premium on maneuverability.

SHORT (14' OR LESS):

Pros

- Increased maneuverability
- Higher initial stability
- Nimble and responsive to turning strokes

Cons

- Slower
- Less glide or carry
- Poor tracking

MEDIUM (14.5' - 17'):

Pros

- Moderate speed and glide
- Can be paddled tandem or solo
- Moderate maneuverability

Cons

- Slower than long canoes
- Less nimble than shorter canoes

LONG (17.25'+):

Pros




- Faster on open, flat water
- Better carry or glide between strokes
- Increased capacity

Cons

- Less maneuverable or nimble
- Heavier than short canoe of same material

HULL (Cross Section)

To visualize this aspect of canoe design, think about bisecting the canoe from side to side. The hull cross section can impact canoe performance in a number of ways, from stability to maneuverability to speed. Canoes usually feature one of three hull cross sections: Flat, Shallow Arch, and Shallow Vee. Note that both Shallow Arch and Vee can vary in terms of degree or angle.



SHALLOW VEE

Explorer, Explorer 15, Explorer 16TT & 14TT, Explorer LT 16, Malecite, Expedition 186, Duckhunter 15 & 16

Pros

- Most versatile hull cross section
- Highest final stability
- Superior rough water performance
- Better tracking
- Superior rigidity for increased hull efficiency
- Can be "tuned" (track: paddle straight up; maneuver: lean hull into turn)

Cons

- Wear concentrated at point of Vee
- Lower initial stability
- Slower than shallow arch in calm conditions

FLAT BOTTOM

Pros

- High initial stability
- Maneuverable

Cons

- Reduced final stability
- Low structural integrity
- Slow
- Unpredictable if leaned or in wAVGs
- Stability reduced as load increases
- Tends to invert (oilcan) unless reinforced or heavily built

SHALLOW ARCH

Adventure 14 & 16, Freedom Solo, Legend 15 & 16, Outrage, Outrage X, Caption, Synergy 12 & 14, Angler 14, Reflection 15 & 17

Pros

- Paddling efficiency & speed in calm conditions
- Higher final stability than flat bottom
- Maneuverable when combined with moderate to extreme rocker

Cons

- Performance degrades in rough waters
- Lower final stability than shallow vee

HULL (Side Profile)

Refers to the form of the side of the canoe looking at it from one end. Canoe sides can be straight, flared, (wider from waterline to gunwale) or tumble-home (narrower at gunwale than at waterline). A canoe can actually feature all three profiles from end to end with flare at bow, tumble-home at center and straight at the stern. The primary factors in determining choice of side profile are stability, paddling efficiency, and ability to shed waves and water. The amount of flare or tumble-home can vary from model to model.



STRAIGHT


Freedom Solo

Pros

- Maintains final stability
- Moderately dry vs. side waves

Cons

- In deep hulls makes for long reach to water
- Subject to windage




FLARED

Explorer, Explorer LT 16, Explorer 15, Explorer 16TT & 14TT, Freedom 17, Legend 16, Malecite, Angler 14, Caption, Synergy 12 & 14, Duckhunter 15 & 16

Pros

- Driest side hull profile
- Increases final stability
- Allows for narrower waterline for increased efficiency and speed



TUCKED

Outrage, Outrage X, Legend 15, Adventure 14 & 16, Reflection 15 & 17, Expedition 186

Pros

- Moderately dry
- Maintains final stability
- Protects gunwales from side impact or abrasion



TUMBLE HOME


Pros

- Allows more efficient paddle stroke
- Preferable for flat/calm water solos


Cons

- Reduces final stability
- Wet vs. side waves as water will follow curve of hull up side

HULL MATERIALS




KEVLAR® KX Mad River's been building canoes of Kevlar aramid fiber longer than anyone else so we know it well. Kevlar's got an awful lot going for it, such as a tensile strength 5 times that of steel. This provides tremendous impact absorption and tear resistance, traits that make Kevlar a choice material for body armor for the military and police. At the same time, Kevlar's not perfect in all respects and over the years Mad River has married the best attributes of Kevlar to a hybrid composite matrix containing fiberglass, graphite, and core material to build the most durable canoes per pound available.



ROYALEX® RX Royalex is a vacuum-formed sheet laminate consisting of external vinyl layers enclosing multiple ABS plastic layers and a foam core. Not all Royalex is the same. Each canoe is made of a specific Royalex sheet designed for the intended use of that canoe. Royalex is very resistant to impact and its' moderate weight makes it the preferred material for paddlers wanting to balance durability and weight in demanding conditions. It has "memory," allowing it to distort to absorb impact and then rebound to original form after pressure is relieved. Royalex is repairable should the worst-case scenario ever occur.



POLYETHYLENE Single solid layer of linear high-density polyethylene is used exclusively in our economically priced Adventure 14+16s and Synergy 12+14s. Polyethylene has excellent abrasion and impact resistance but if unsupported is too flexible for efficient paddling. Rather than simply put a reinforcing pole down the center of the hull we opted to integrate the hull and deck structure to provide the necessary rigidity and gain the strength available in a uni-body style construction. The result is a very tough and virtually maintenance free hull at a very modest price. Weight is comparable to TT hulls.



TRIPLE TOUGH™ TT Mad River's proprietary polyethylene skin/foam/skin hull material produces a tough, durable, maintenance-free, value-priced hull. Foam core provides integral flotation and stiffness. High density linear polyethylene skins provide superior impact protection and are repairable. TT hulls average about 15 – 20% heavier than Royalex and offer similar performance characteristics.

SYMMETRY

Symmetry refers to the shape of the canoe viewed from overhead. Canoes can be symmetrical or asymmetrical. Asymmetrical canoes can be fish-form with widest point ahead of center or swede-form with widest point behind center.



SYMMETRICAL

Explorer, Explorer LT 16, Explorer 15, Explorer 16TT & 14TT, Freedom 16, 17 & Solo, Legend 15 & 16, Malecite, Duckhunter 15 & 16

Pros
• Predictable handling
• Can be paddled in reverse for better trim with adult/child paddlers or solo paddler

Cons
• Slower than swede-form hull

ASYMMETRICAL SWEDE FORM

Synergy 12 & 14, Adventure 14 & 16, Reflection 15 & 17, Expedition 186

Pros
• Enhanced forward speed
• Enhanced glide

Cons
• Can't be paddled backwards without some performance degradation in speed and glide
• Can be wet when paddling into waves

ASYMMETRICAL FISH FORM

Outrage, Outrage X, Caption

Pros
• Improved buoyancy over drops
• Increased dryness and wave deflection

Cons
• Slow
• Decreased glide

KEEL LINE

A canoe's keel line is the profile of the hull bottom running from stem to stern, best seen by standing back and viewing the canoe from the side. The keel line can range from straight or level to highly arched or rockered (think of the runner on bottom of a rocking chair). We classify canoes that have less than 2" of rocker as slightly rockered. Models with rocker ranging from 2" to 4" are considered moderately rockered and those with over 4" of rocker as extremely rockered.



SLIGHTLY ROCKERED

Angler 14, Adventure 14 & 16, Malecite, Synergy 12 & 14, Reflection 15 & 17, Expedition 186

Pros
• Enhanced tracking, speed

Cons
• Limited maneuverability

MODERATELY ROCKERED

Explorer, Explorer LT 16, Explorer 15, Explorer 16TT, Explorer 14TT, Freedom Solo, Legend 15, Legend 16, Duckhunter 15 & 16

Pros
• Good balance between maneuverability and speed
• Most versatile keel line

Cons
• Reduced tracking than straight keel
• Reduced speed than straight keel
• Less maneuverable than highly rockered

EXTREMELY ROCKERED


Outrage, Outrage X, Caption

Pros
• Enhanced maneuverability


Cons
• Poor tracking
• Reduced forward speed

GUNWALES & WEIGHT


Your choice of gunwales will affect the final weight of your canoe. This is one of the reasons Mad River provides so many gunwale options to choose from. Weights in this catalog reflect canoes outfitted with either IQ2 vinyl or wood gunwales. If lightest possible weight is your priority, opt for canoes with conventional aluminum gunwales such as the Explorer LT 16, Reflection 15 or 17, Angler 14, Explorer KX or Malecite KX. Savings will vary depending on length of canoe but will average 2 to 3.5 lbs




IQ™ Aluminum gunwale with dual channels to allow repositioning of seats and installation (and removal) of modular accessories. Hidden fasteners for clean sleek appearance and nothing to snag your hand on. Moderately light and very stiff to maximize hull efficiency. Minimal maintenance.




IQ2™ Vinyl gunwale version of the IQ. Features two channels as original IQ and provides same capabilities except for movable seats. Moderate to heavy weight with moderate stiffness with internal aluminum "L" insert. Maintenance free.



WOOD To many, there's nothing like a wood gunwaled canoe and Mad River's always been known for the quality workmanship in our wood gunwales. Crafted of native white ash specially selected for long, straight, tight grain providing strength, stiffness, and a touch of flex. Periodic maintenance required. Choice of natural or dark walnut finish.



ALUMINUM FOR ROYALEX Slightly "beefier" than our aluminum rail for composite canoes. Designed to minimize weight and maximize efficiency in select cruising Royalex canoes such as the Explorer LT 16, Reflection 15 & 17. Light to moderate in weight and high stiffness. Minimal maintenance.



ALUMINUM FOR COMPOSITE Specifically engineered for Kevlar composite canoes for lightest weight and maximum stiffness for efficiency. Proprietary design captures and hides rough edges of fasteners. Light weight with minimal maintenance.

SEATING



IQ SEAT

Bucket seat is contoured for stability and can be adjusted for height and for angle for maximum comfort and support. Standard on all IQ outfitted canoes. Not available on IQ2, aluminum or wood gunwaled canoes.

CANE SEAT

Traditional flat ash framed seat with cane insert. Lightweight and comfortable and cane does not hold or absorb water making for a drier ride. Not available on IQ.

WEB SEAT

Traditional flat ash framed seat with woven web seating. Provides increased durability over cane at comparable weight. Standard on Explorer 16TT, and 14TT, with vinyl gunwales and standard on Royalex canoes with wood, IQ2, or aluminum gunwales. Not available on IQ.

CONTOURED CANE SEAT

Find your center, easily and comfortably. The arced seat surface of our Contoured Seat keeps paddlers centered without effort, allowing maximum focus and efficiency. The contoured seat has the advantage over the bucket in that it is equally comfortable when used in either direction, allowing paddlers to go solo in a tandem boat by facing around in the bow seat. Standard bow seat on Explorer & Malecite KX models.

CANE BUCKET SEAT

Better... by design. Our Cane Bucket Seat combines the advantages of a cane seat (lightweight, breathability, quick drying, ventilating) with those of a bucket seat (security of position, paddling efficiency) and the result is a comfortable, secure seat. 34" (86cm) overall width and available in natural finish. Standard stern seat on Explorer & Malecite KX and bow and stern on Expedition 186.

GUNWALE & SEATING SYSTEM


Mad River offers more choice in how you want your canoe outfitted than any other manufacturer with 6 gunwale options and 3 seating choices providing more performance and more comfort.

| CANOES | GUNWALES | | | | | | SEATING SYSTEMS | | |
|-------------------|----------|-----|------|-------------|-------------|----------|-----------------|------|-----|
| | IQ | IQ2 | WOOD | ALUMINUM RX | ALUMINUM KX | INTEGRAL | IQ | CANE | WEB |
| Explorer 16 LT RX | | | | | | | | | |
| Explorer 16 RX | | | | | | | | | |
| Explorer 16 KX | | | | | | | | | |
| Explorer 15 RX | | | | | | | | | |
| Explorer 14 TT | | | | | | | | | |
| Explorer 16 TT | | | | | | | | | |
| Freedom Solo | | | | | | | | | |
| Malecite | | | | | | | | | |
| Legend 15 RX | | | | | | | | | |
| Legend 16 RX | | | | | | | | | |
| Reflection 15 | | | | | | | | | |
| Reflection 17 | | | | | | | | | |
| Expedition 186 | | | | | | | | | |
| Outrage | | | | | | | | | |
| Outrage X | | | | | | | | | |
| Caption | | | | | | | | | |
| Adventure 16 | | | | | | | | | |
| Adventure 14 | | | | | | | | | |
| Duckhunter 16 | | | | | | | | | |
| Duckhunter 15 | | | | | | | | | |
| Angler 14 | | | | | | | | | |
| Synergy 12 | | | | | | | | | |
| Synergy 14 | | | | | | | | | |

= STANDARD EQUIPMENT


= OPTIONAL EQUIPMENT

Polyethylene and Royalex expand and contract with changes in temperature and humidity. Actual dimensions can vary from those shown in the Specifications Chart due to molding process and/or exposure to extreme hot or cold temperatures. Slight variations are not covered by warranty. Specifications and features are subject to change without prior notice.

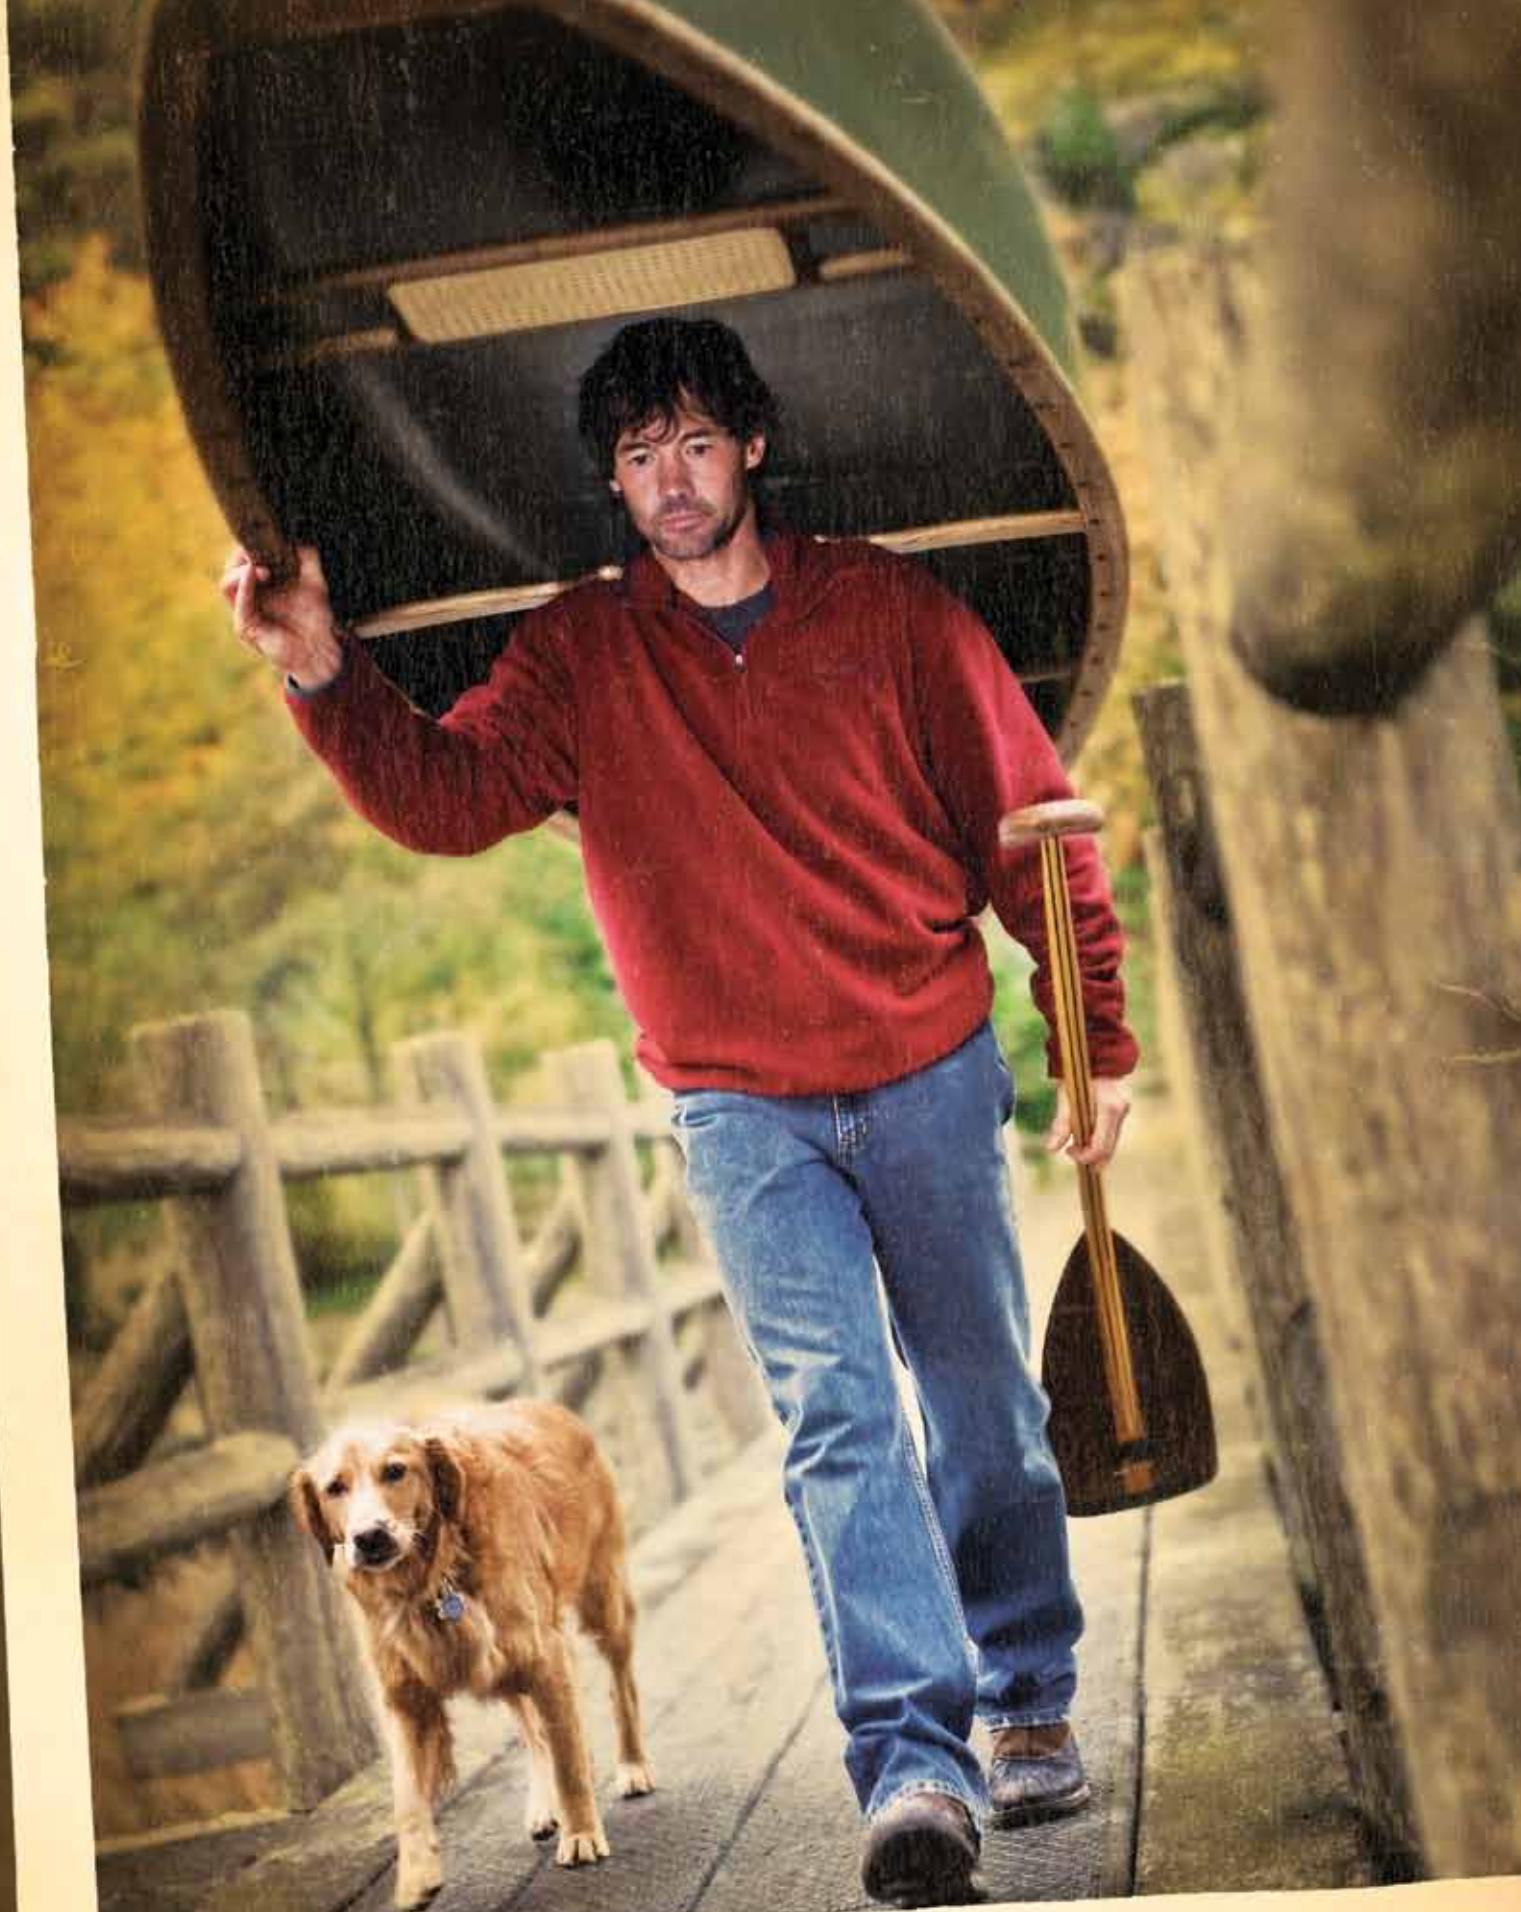


∞ C O L O R O P T I O N S ∞

∞ C A N O E S P E C I F I C A T I O N S ∞

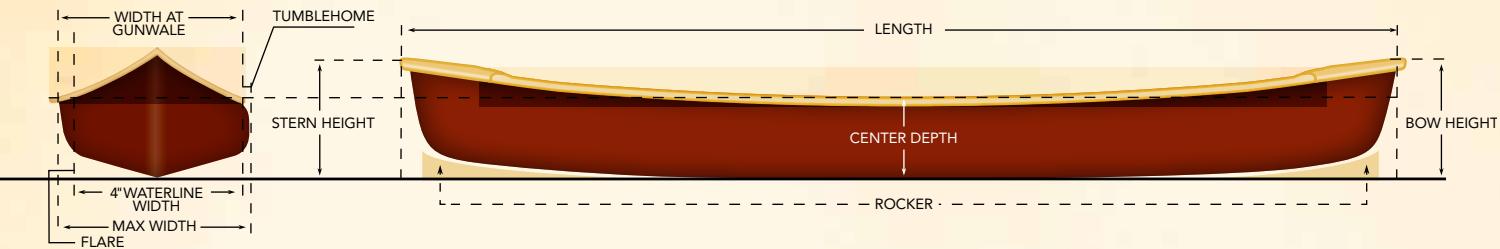


ROTOMOLDED & TRIPLE TOUGH COLORS




*Camo only available on Synergy 12 & 14.

ROYALEX COLORS

(All colors not available on all models)



KEVLAR COLORS



| PAGE | CANOES | LENGTH | WIDTH | | | DEPTH | | | ROCKER | | CAPACITY | AVERAGE WEIGHT | IQ SYSTEM |
|------|-------------------|---------------------|----------------|----------------|----------------|------------------|----------------|----------------|--------------|---------------|-------------------|----------------|-----------|
| | | | GUNWALE | @ 4" WATERLINE | MAXIMUM | @ CENTER | @ BOW | @ STERN | @ BOW | @ STERN | | | |
| 3 | EXPLORER 16 LT RX | 15' 11.25" / 486 cm | 35.25" / 90 cm | 33.25" / 85 cm | 35.25" / 90 cm | 14.5" / 37 cm | 21.25" / 54 cm | 21" / 53 cm | 2.25" / 6 cm | 2.25" / 6 cm | 1100 lbs / 499 kg | 65 lbs / 29 kg | IQ |
| 3 | EXPLORER 16 RX | 15' 11.25" / 486 cm | 35.25" / 90 cm | 33.25" / 85 cm | 35.25" / 90 cm | 14.5" / 37 cm | 21.25" / 54 cm | 21" / 53 cm | 2.25" / 6 cm | 2.25" / 6 cm | 1100 lbs / 499 kg | 72 lbs / 33 kg | IQ / IQ2 |
| 3 | EXPLORER 16 KX | 16' 3" / 495 cm | 34.5" / 88 cm | 33.25" / 85 cm | 34.5" / 88 cm | 14.5" / 37 cm | 22.75" / 58 cm | 21" / 53 cm | 2.25" / 6 cm | 2.25" / 6 cm | 1100 lbs / 499 kg | 54 lbs / 25 kg | IQ |
| 4 | EXPLORER 15 RX | 14' 9" / 449 cm | 35.75" / 91 cm | 33.75" / 86 cm | 35.75" / 91 cm | 14.25" / 36 cm | 21" / 53 cm | 20" / 51 cm | 2.25" / 6 cm | 2.25" / 6 cm | 850 lbs / 386 kg | 62 lbs / 28 kg | IQ / IQ2 |
| 4 | EXPLORER 14 TT | 14' 6" / 442 cm | 36" / 91 cm | 34" / 86 cm | 36" / 91 cm | 14.5" / 37 cm | 22" / 56 cm | 21" / 53 cm | 2.25" / 6 cm | 2.25" / 6 cm | 850 lbs / 386 kg | 72 lbs / 33 kg | IQ2 |
| 4 | EXPLORER 16 TT | 16' / 486 cm | 36" / 91 cm | 34" / 86 cm | 36" / 91 cm | 14.75" / 37.5 cm | 22" / 56 cm | 21" / 53 cm | 2.25" / 6 cm | 2.25" / 6 cm | 1100 lbs / 499 kg | 82 lbs / 38 kg | IQ2 |
| 5 | FREEDOM SOLO | 14' 6.75" / 444 cm | 30.5" / 78 cm | 29" / 74 cm | 30.5" / 78 cm | 14.25" / 36 cm | 20" / 51 cm | 19.75" / 50 cm | 2.5" / 6 cm | 2.5" / 6 cm | 750 lbs / 340 kg | 55 lbs / 25 kg | IQ / IQ2 |
| 5 | MALECITE | 16' 5.25" / 501 cm | 34.5" / 88 cm | 32.25" / 82 cm | 34.5" / 88 cm | 13" / 33 cm | 19" / 48 cm | 18" / 46 cm | 1.5" / 4 cm | 2.25" / 6 cm | 850 lbs / 386 kg | 51 lbs / 23 kg | IQ |
| 7 | LEGEND 15 RX | 15' / 457 cm | 33.5" / 85 cm | 33" / 84 cm | 33.5" / 85 cm | 14.5" / 37 cm | 22" / 56 cm | 20" / 51 cm | 2" / 5 cm | 2" / 5 cm | 960 lbs / 435 kg | 66 lbs / 30 kg | IQ2 |
| 7 | LEGEND 16 RX | 16' / 488 cm | 33.5" / 85 cm | 33.5" / 85 cm | 33.5" / 85 cm | 14.5" / 37 cm | 22" / 56 cm | 20" / 51 cm | 2" / 5 cm | 2" / 5 cm | 1100 lbs / 499 kg | 72 lbs / 33 kg | IQ2 |
| 9 | REFLECTION 15 | 15' 4" / 467 cm | 34" / 86 cm | 33" / 84 cm | 34" / 86 cm | 13.5" / 34 cm | 19" / 48 cm | 19" / 48 cm | 1" / 3 cm | 1" / 3 cm | 800 lbs / 363 kg | 58 lbs / 27 kg | IQ |
| 9 | REFLECTION 17 | 17' 4" / 528 cm | 33.5" / 85 cm | 33" / 84 cm | 33.5" / 85 cm | 13" / 33 cm | 19.5" / 50 cm | 19.5" / 50 cm | .25" / 6 cm | .5" / 1 cm | 900 lbs / 408 kg | 66 lbs / 30 kg | IQ |
| 9 | EXPEDITION 186 | 18' 6" / 564 cm | 34" / 86 cm | 31" / 79 cm | 34" / 86 cm | 14.5" / 37 cm | 20.5" / 52 cm | 18.75" / 48 cm | 2.25" / 6 cm | 1" / 3 cm | 1250 lbs / 568 kg | 59 lbs / 27 kg | N/A |
| 11 | OUTRAGE RX | 12' / 365 cm | 25.5" / 65 cm | 26.75" / 68 cm | 28.25" / 72 cm | 15.5" / 39 cm | 23.5" / 59 cm | 22.25" / 57 cm | 5.5" / 14 cm | 5.75" / 14 cm | 425 lbs / 193 kg | 52 lbs / 24 kg | IQ2 |
| 11 | OUTRAGE X RX | 13' / 396 cm | 25.5" / 65 cm | 27.25" / 69 cm | 29" / 73 cm | 15" / 38 cm | 24.75" / 63 cm | 22" / 56 cm | 6" / 15 cm | 5" / 13 cm | 550 lbs / 250 kg | 53 lbs / 24 kg | IQ2 |
| 11 | CAPTION RX | 14' / 428 cm | 30" / 76 cm | 30.5" / 77 cm | 32" / 81 cm | 15.5" / 39 cm | 23" / 59 cm | 23" / 59 cm | 5" / 13 cm | 5" / 13 cm | 850 lbs / 386 kg | 58 lbs / 26 kg | IQ2 |
| 13 | ADVENTURE 16 | 16' / 488 cm | 33" / 84 cm | 34" / 86 cm | 37" / 94 cm | 14" / 36 cm | 19" / 48 cm | 16.75" / 43 cm | .5" / 2 cm | 1" / 3 cm | 950 lbs / 431 kg | 84 lbs / 38 kg | N/A |
| 13 | ADVENTURE 14 | 14' / 427 cm | 33" / 84 cm | 34" / 86 cm | 37" / 94 cm | 14.5" / 37 cm | 21" / 53 cm | 18" / 46 cm | 1" / 3 cm | .5" / 1 cm | 875 lbs / 397 kg | 75 lbs / 34 kg | N/A |
| 15 | DUCKHUNTER 16 | 15' 11.25" / 486 cm | 35.25" / 90 cm | 33.25" / 85 cm | 35.25" / 90 cm | 14.5" / 37 cm | 21.25" / 54 cm | 21" / 53 cm | 2.25" / 6 cm | 2.25" / 6 cm | 1100 lbs / 499 kg | 74 lbs / 34 kg | N/A |
| 15 | DUCKHUNTER 15 | 14' 9" / 449 cm | 35.75" / 91 cm | 33.75" / 86 cm | 35.75" / 91 cm | 14.25" / 36 cm | 21" / 53 cm | 20" / 51 cm | 2.25" / 6 cm | 2.25" / 6 cm | 850 lbs / 386 kg | 64 lbs / 29 kg | N/A |
| 15 | ANGLER 14 | 13' 11" / 424 cm | 37.25" / 96 cm | 35.5" / 90 cm | 37.25" / 96 cm | 14.25" / 36 cm | 21" / 53 cm | 21.25" / 54 cm | .75" / 2 cm | .875" / 2 cm | 750 lbs / 340 kg | 56 lbs / 25 kg | IQ |
| 16 | SYNERGY 12™ | 12' / 366 cm | 30.75" / 78 cm | 28" / 71 cm | 30.75" / 78 cm | 10" / 25 cm | 14.5" / 37 cm | 12.25" / 31 cm | 2" / 5 cm | .5" / 1 cm | 350 lbs / 131 kg | 60 lbs / 27 kg | N/A |
| 16 | SYNERGY 14™ | 14' / 428 cm | 30" / 76 cm | 28" / 71 cm | 30" / 76 cm | 10" / 25 cm | 14.25" / 36 cm | 12.25" / 31 cm | 2.25" / 6 cm | 1.5" / 4 cm | 400 lbs / 149 kg | 64 lbs / 29 kg | N/A |

∞ T O B E C O N T I N U E D ∞

Have you reached the end, or is this just the beginning? A question for the ages, surely, but one only you can answer. Did you feel your heart quicken at the thought of playing in white water? Did your mind wander at the prospect of paddling serenely on open water? Could you smell the air? Taste the freedom? Mad River's innovations will continue to flow throughout the years as we refine conventional thinking and introduce new concepts to take you where you want to go. Wherever that is, you can feel confident in Mad River's commitment to quality design, materials and craftsmanship and content that friend Rabbit is leading the way.

All Mad River Canoes are designed and manufactured in the U.S.A. and are covered by a Limited Lifetime Warranty. Some limitations apply. Visit www.madrivercanoe.com for full details.

To see a full assortment of Mad River Canoe outfitting and accessories visit www.harmonygear.com.

Colors may vary slightly from those shown in catalog. Color combinations (Camo) will vary from those shown in catalog and are unique for each boat we produce. Variations in color are not covered by warranty.

Prices shown are based on US Manufacturer's Suggested Retail Price and are subject to change.

U.S./GLOBAL HEADQUARTERS
MAD RIVER CANOE
111 Kayaker Way
Easley, SC 29642

Tel or Fax: 888-52 KAYAK
(888-525-2925)
www.madrivercanoe.com

CANADA
MAD RIVER CANOE
745 Development Drive Unit 3B
Kingston, Ontario
Canada K7M 4W6

Tel: 877-370-4978
Fax: 613-384-2550
www.madrivercanoe.com

INTERNATIONAL

NORWAY
Aktiv Fritid As
Tel: +4767815100
e-mail: post@aktivfritid.no

**GERMANY, SWITZERLAND, AUSTRIA,
CZECH REPUBLIC, SLOVENIA,
POLAND, ITALY**
Blue And White
Tel: +49 803690630
e-mail: info@kajak.de

**NETHERLANDS,
BELGIUM, LUXEMBOURG**
Paddle Sports United
Tel: +31 (0) 10-5215707
e-mail: sales@paddlesportsunited.eu

JAPAN
Mont Bell
Tel: +81 (0) 6 6536 5740
e-mail: support@montbell.com

SPAIN
Outdoor Kayak
Tel: +34 973-662 092
e-mail: info@outdoorkayak.com

AUSTRALIA
Paddle Pro
Tel. +61 (0) 3 9546 7486
e-mail: sales@paddlepro.com.au

**REPUBLIC OF IRELAND,
NORTHERN IRELAND**
Progressive Distribution
Tel: +353-87-2228767
e-mail: info@progressivedistribution.ie

RUSSIA
Three Elements
Tel: +7 (495) 5045260
e-mail: alex@tristihii.ru

MEXICO
United Watercraft
Tel: +52 (555) 272 2132
e-mail: boatbox@boatbox.com.mx

**UNITED KINGDOM
EXCEPT NORTHERN IRELAND**
Palm Equipment International Ltd.
Tel: +44 1275 798100
e-mail: info@madrivercanoe.co.uk

FINLAND, SWEDEN
Bear & Water
Tel: +358 (10) 423 6900
e-mail: sale@bearwater.fi

VENEZUELA
Adrenalina Deportes
Tel: +58 (212) 762 2284
e-mail: servicioalcliente@adrenalina.com

FRANCE
Ox Kayak
Tel: +33 (0) 611 487 355
e-mail: sales@oxkayak.eu

FSC Logo
Placement